

MODEL: C2600-II

M.2 NVMe Cooler Heatsink with 20mm PWM Fan

(This heatsink only fit for desktop PC.)

www.ineo-usa.com

Getting Started

Thank you for purchasing ineo C2600-II M.2 NVMe Cooler Heatsink with 20mm PWM Fan. This quick install guide provides step-by-step installation instructions and other important information regarding your ineo product. For the latest ineo product information and news, please visit our website at <http://www.ineo-usa.com>

Package Contents


Main Heatsink with Fan	x1
Bottom Clasp Heatsink	x1
Thermal Pad	x2
ScrewDriver	x1
Fixing screw	x2
Fixed column	x1
Guarantee Card	x1
User Manual	x1

Features :


- The add-on RGB heat sink/fan combo for bare M.2 2280 solid state drives
- Consists of a PCB, fan and aluminum heatsink Reduces SSD temperature by at least 25%
- Apply to 22x80mm size
- Apply to NVME M.2 SSD with chips on one side and both sides
- 20mm silent fan, 10000 rpm, no speed adjustment
- 4PIN SATA Power interface supply is stable and simple, versatility, easy to install
- Comprehensive heat dissipation, 10°C - 40°C cooling effect
(Varies depending on the environments)

M.2 SSD Drive Installation


- 1 Remove the Main Heatsink with Fan.




- 2 Install thermal silicon, M.2 SSD card, heat sink, and lock 4 screws.



- 3 Insert the M.2 card heat sink into the plug M key connector of the M Key computer motherboard and lock the screw.

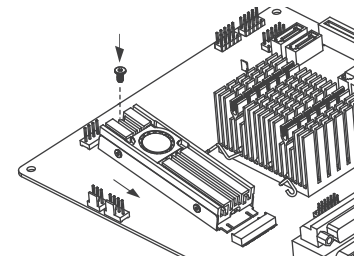

- 4 Then insert the 4 PIN plug into the 4 PIN socket on the motherboard of the computer and the installation is complete.

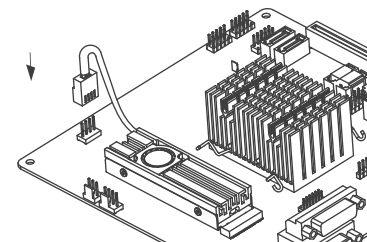

EMC260002IN-US